

BASIN MOUNTED SENSOR TAP



WELS REG # T30923



AS/NZS 3718 Lic. WMKA 20371
SAI Global



features and benefits

- Contains less than 0.25% of lead content
- Modular one piece construction with all serviceable components above the basin
- Double infrared sensor with automatic setting feature and microprocessor
- Bi-Stable magnetic solenoid valve (for increased energy savings)
- Water Supply Connection with flexible high pressure hose and strainer
- Aqua click feature enables temporary - off (for cleaning purposes) or continuous water flow (for filling the basin)
- Appropriate mounting hardware included
- Check valves and built in strainers
- 12 or 24 hour hygienic rinse activatable
- Installation similar to conventional single lever tap

about

Britex Basin Mounted Sensor Tap is ideal for any hand washing station, perfectly pairing with Britex Troughs and Hands Basins. The automatic sensor tap offers optimal hygiene and accessibility when installed correctly.

sample spec. text

Britex Basin Mounted Sensor Tap - Product Code: AESB

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE
Britex Place, Mirra Crt
Bundoora VIC 3083
t (03) 9466 9000
f (03) 9466 9044

SYDNEY
16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
f (02) 9531 2800

PERTH
Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
f (08) 9248 6893

BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400
f (07) 3363 2444

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

BASIN MOUNTED SENSOR TAP

PRODUCT CODE

AESB

technical
information

WELS: 6 Star Rating (4.5L/min)

Nominal Flow Rate (LPM): 4.3

WaterMark: AS/NZS 3718 Lic. WMKA20371

Operating pressure: 30kPa - 500kPa

Maximum water temperature: 80°C

Aerator: Economy aerator, cascade (self-cleaning)

Inlet Connection: Flexible hose at 350mm long

Strainer: 0.5mm mesh size

Sensor-sensitivity: Automatic self-adapting sensor technology

Sensor range nominal: 102mm - 127mm


Hygienic rinse time: 2 minutes pre-set (adjustable from 0.5 - 20 minutes)

Temporary-off: 2 minutes (fixed)

Time Out Setting: 2 minutes — Maximum time tap will run upon continuous detection

Power Supply: Mains Power

Engineering standards: Noise class I, DIN EN 200; P-IX 9576 / IA

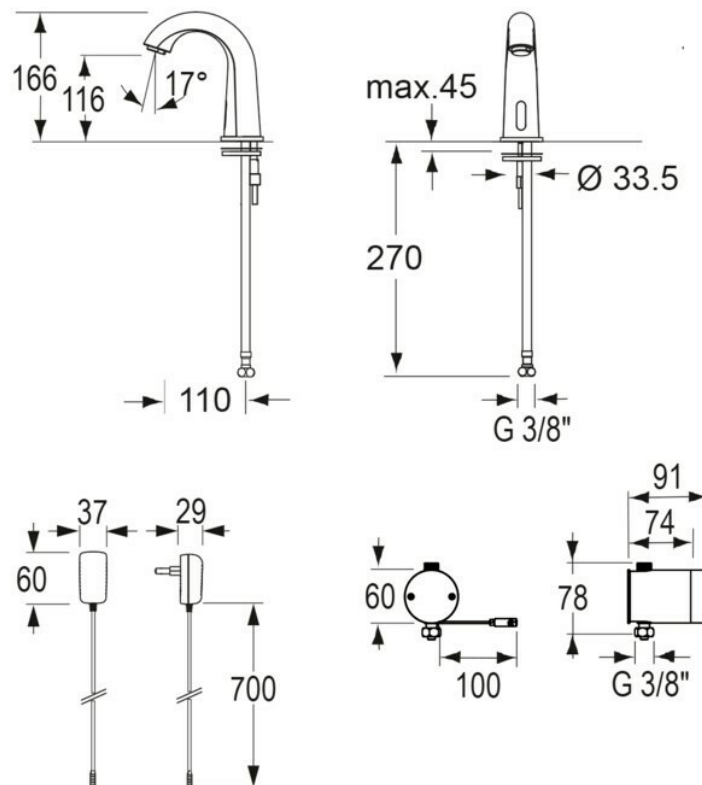

specifying
guide

When specifying this product please include:

- Product Name and Code

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Jan 2024