
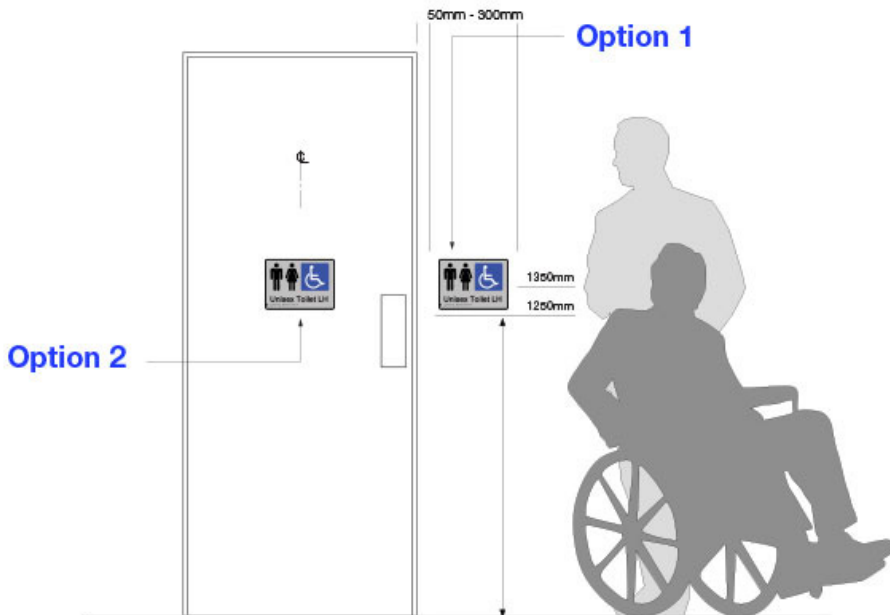


Braille Signs

Installation Guide



Installation Requirements

Regulations for Installation of Braille Signage:

Height

Braille Signs are to be positioned with the Braille not higher than 1250mm from the floor and not lower than 1250mm from the floor.

Location

Braille Signs are to be positioned on the wall on the door handle side of the door with the closest edge of the sign being positioned between 50mm and 300mm from the architrave. When this is not possible, the sign can be positioned on the door itself.

All braille signs are to be blind mounted

This means no fixings (i.e. screws or bolts) are to be exposed on the sign face. Signs come fitted with double sided tape for easy self-application.

Surface Preparation

We recommend all surfaces be cleaned with acetone and a clean rag prior to installing signs.

The double sided tape is pressure sensitive and must be pressed firmly onto the substrate it is applied to, to achieve maximum adhesion.

Proper installation is the responsibility of the installer and we will not be held liable for any installation failures.

Compliance

This sign is compliant to Building Code section D3.6 and Design for Access and Mobility (AS1428.1).