
## Vandal Resistant Wash Basin







 Fixture strength is ultimately determined by the load capacity of the supporting structure (noggins recommended for stud walls) and use of appropriate fixings. 2) Basin is secured to wall with an offset bracket positioned behind the rear/top of the basin. 3) Two additional fixing points are integrated into the basin body near the base (fixings not supplied).
Remove access panel in base to fit off plumbing and wall fixings then replace panel. 5) P trap not supplied.

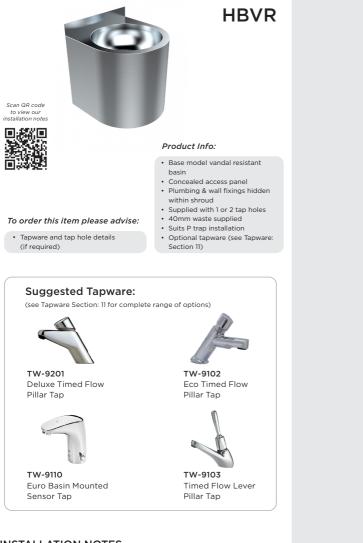


Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print



Optional Tap shown for indicative purposes only.







Please refer to britex.com.au for the most current product information Allow +/- 5mm tolerance for dimensions and setouts shown in product literature

Last Revised 2019