


LSPW

50mm Stainless Steel Waste

Installation Guide

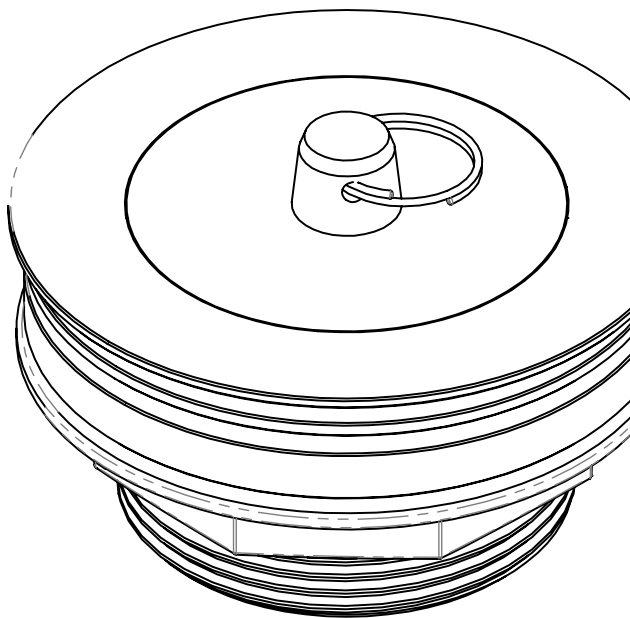

MELBOURNE

Britek Place Mira Crt
Bundoora VIC 3083
t (03) 9466 9000
e vic@britek.com.au

SYDNEY

16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
e nsw@britek.com.au

PERTH

Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
e wa@britek.com.au

BRISBANE

19 Manila St
East Brisbane QLD 4169
t (07) 3363 2400
e qld@britek.com.au

ADELAIDE

The Britek Group
SA State Office
t 1300 764 744
e sa@britek.com.au

IMPORTANT

ALL SERVICE TO BE PERFORMED BY AN AUTHORISED SERVICE PERSON

*Installation of this unit must be in accordance with the Plumbing Code of Australia (PCA)
For further support and after-sales care, please contact Britex.*



WARNING

WHEN INSTALLATION IS COMPLETE, ENSURE THESE INSTRUCTIONS REMAIN INSIDE
THE PLASTIC BAG PROVIDED WITH THE UNIT FOR FUTURE REFERENCE


About

The BRITEX 50mm Stainless Steel Waste outlet is fabricated from grade 316 acid resistant stainless steel and perfectly complements laboratory sinks. Wastes are Watermark certified, conform to Australian Standards and are supplied with a removable grate, rubber gaskets, stainless steel stopper with ring pull and stainless steel backnut.

Installation Notes

1. Pull the LSPW out of the box it comes in, if there is any damage to the product, please notify Britex within 24 hours of receipt.
2. The box should contain the waste, which will have a 316 stainless steel plug, Stainless removable grate, two rubber washers and a backnut.
3. Take the backnut off the LSPW, remove the thicker rubber washer.
4. Place the rest of the unit into the trough or sink from the top. Place the thicker rubber washer back on the thread from the bottom of the sink or trough and secure it in place with the backnut. Tighten the backnut accordingly.
5. Now the plumbing to the waste can be installed according to the PCA (Plumbing Code of Australia).


Note: There is no need for special tool or training.

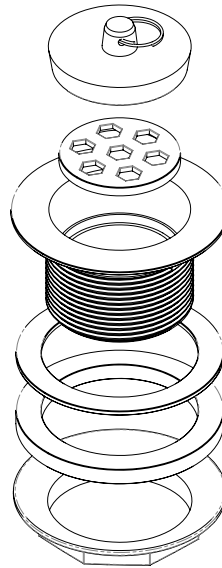



Troubleshooting Guide

SYMPTOM	CAUSES	ACTION
Leaking waste	Not tighten to the correct amount	Tighten the waste and ensure it is Plumbed according to the PCA (Plumbing code of Australia)


LSPW Drawing

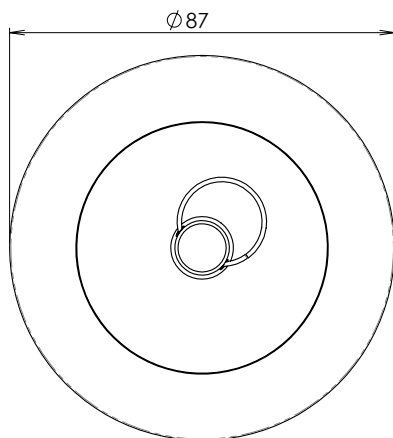

Grade 316
Stainless Steel

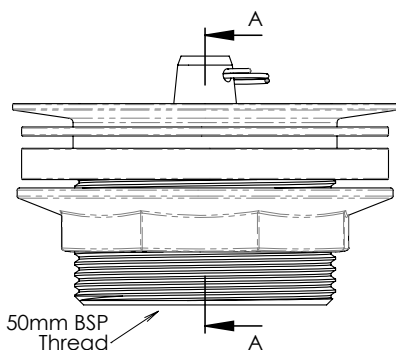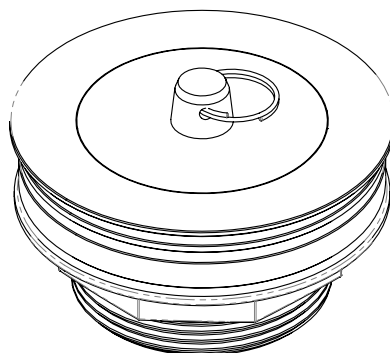

50mm BSP
Thread

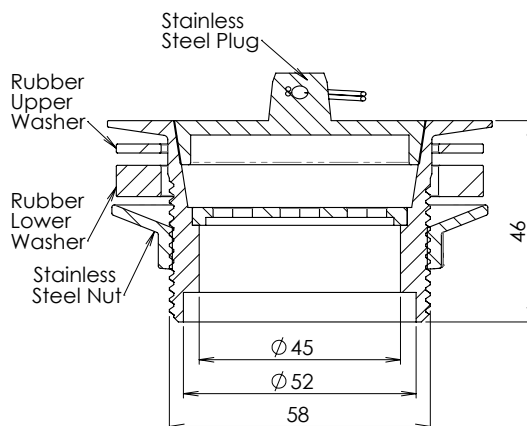

Care and Maintenance

Stainless steel products should be kept clean at all times. The secret to stainless steel's ability to maintain a high quality finish and promises of a long life expectancy is the invisible chromium-oxide film that sits on the surface and protects the steel beneath. To maintain this film it is essential that the surface remains clean and in constant contact with oxygen. If this film is penetrated (either by abrasion or chemically) and dirt, liquid, grime contaminants embed themselves in these micro chasms for an extended period of time, the chromiumoxide film will not be able to regenerate and the steel below will eventually become damaged and discoloured.

What we recommend for general cleaning and maintenance:

Cleaning Materials:

- A soft cloth
- A soft-bristled brush
- A natural or artificial sponge

Cleaning Solutions:

- Hand washing soap / soft water solution
- Mild soap / soft water solution
- White vinegar / soft water solution

It is recommended that general cleaning of stainless steel surfaces be carried out weekly, or as soon as a build up of surface media has been observed. To clean, simply wash stainless steel surfaces with, warm, diluted, mild soapy water using a cloth or soft bristled brush. Once all dirt, oil and grime is removed, rinse thoroughly with clean water and wipe dry

Do NOT - use a metal brush or steel wool to clean stainless steel. Ever. These tools will scratch the surface as well as potentially leave behind steel fragments that can go rusty and cause the stainless to discolour. Using these materials will void the warranty.

Do NOT - use scourers of any kind that have previously been used on ordinary steel. Microscopic steel fibers transferred onto stainless steel can cause considerable damage to the surface and will void the warranty.

Do NOT - use abrasive cleaning brushes, pads or agents on highly polished finishes

Do NOT use harsh cleaners that contain powerful acidic or alkaline chemicals such as hydrochloric acid and sodium hydroxide that will damage the surface. Any water coming into contact with stainless steel, particularly cleaning solutions, should have zero chloride content as even minute amounts can cause damage. Using these cleaners will void any product warranty.

Do NOT - use chlorinated sanitizers, cleansers or bleach of any kind. Using these substances will void the warranty. Despite some cleaners displaying the text, 'Suitable for Toilets and Urinals' this is more likely in reference to ceramic/vitreous China products and use of these cleaners can damage stainless steel and will void the warranty.

Do NOT - use brick cleaning liquids that contain hydrochloric acid anywhere near stainless. If cement needs to be removed from stainless (before it sets), a mixture of hot water and 25% vinegar or 10% phosphoric acid can be effective. Once cleaned, the surface should then be neutralised with dilute ammonia or sodium bicarbonate then rinsed and dried.

Warranty

The BRITEX product is backed by our manufacturer's warranty available for download from our website at www.britex.com.au. We expressly warrant that the product is free from operational defects in workmanship and materials for the warranty period indicated on the schedule in the manufacturer's warranty. During the warranty period, BRITEX will repair or replace any defective products manufactured by BRITEX at no charge, provided that the terms of the manufacturer's warranty are followed.

This warranty is the only warranty given by BRITEX, and we expressly disclaim all other warranties, including but not limited to implied warranties of merchantability and fitness for a particular purpose. This warranty represents the sole and exclusive remedy for breach of warranty, and BRITEX shall not be liable for any incidental, special, or consequential damages, including lost profits, labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, electrical or any other circumstances beyond BRITEX's control.

This warranty shall be void if the product is abused, misused, improperly installed, maintained, or altered. By purchasing our product, you agree to these terms and conditions. We appreciate your business and look forward to providing you with high-quality products and services.

