


BRITEX

SECURITY COMBINATION UNITS

Britex Combination Units are currently supplied as a preferred and approved product to Corrective and Secure Facilities Departments within Australia. This document provides the Britex Security Combination Suite options available.

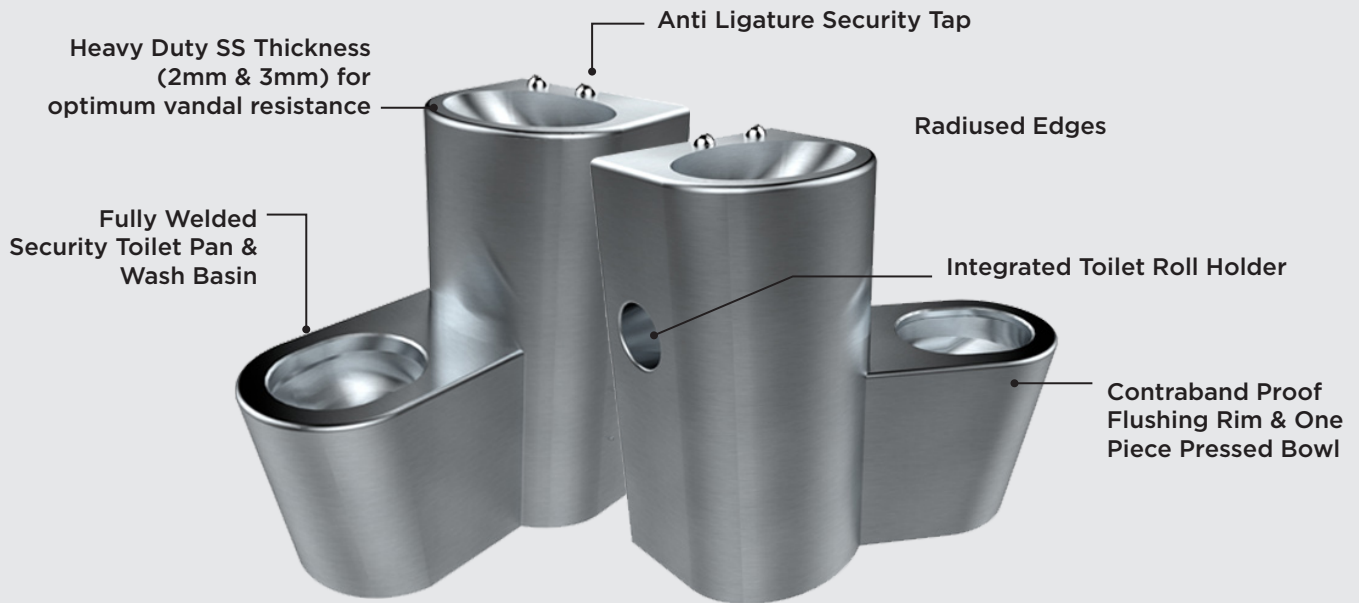

PRODUCT CODE SPECIFICATION KEY

SCUC - (Pan Angle) - (Pan Orientation) - (Trap Style) - (Tap Option) - (Flush Option)

Heavy duty grade 304 stainless steel construction incorporating large safety radius and re-enforcement bars to perimeter of pan and basin. Anti Ligature Suicide Resistant Security Waste Outlet within basin. Rear Access or Side Access Panels with Integral Toilet Roll Holder. Watermark & 4* WELS Certification.

PAN ANGLE

- 35** Degree Offset from Pedestal Body
- 90** Degree Offset from Pedestal Body
- #** Custom offset to be nominated

PAN ORIENTATION

- Choose from Left or Right Orientation:
- L:** Left Hand Offset from Pedestal Body
- R:** Right Hand Offset from Pedestal Body

TRAP STYLE

- Choose from S or P Trap
- S:** S Trap
- P:** P Trap

SECURITY TAPWARE OPTIONS

- TW-SEC-01** Timed Flow Security Tapware (Cold only) Watermark & 6* WELS Certification.
- TW-SEC-01E** Timed Flow Electronic Security Tapware (Cold only). Watermark & 6* WELS Certification.

FLUSHING OPTIONS

- FFV-E45** Electronic Flush Valve. (4.5 / 3 Litre Dual Flush) Inclusive of flush mounted Dual Flush Piezo Touch Buttons with repetitive flush lock out. (250 kPa – 500 kPa) Watermark & 4* WELS Certification.
- FFV-HM63** Hydraulic Mains Pressure Flush Valve. (6 / 3 Litre Dual Flush) Inclusive of Dual Flush Actuator Buttons. (150 kPa– 500 kPa) Watermark & 3* WELS Certification.
- FFV-HT63** Hydraulic Low Pressure Flush Valve. (6 / 3 Litre Dual Flush) Inclusive of Dual Flush Actuator Buttons. (50 kPa –300 kPa) Watermark & 3* WELS Certification.
- FIW-SEC(453 or 63)** In Wall Cistern (4.5/3 or 6/3 Litre Dual Flush) supplied with low profile Stainless Steel Penitentiary Dual Flush Actuator Buttons. (Supplied separately with In-wall Security Mounting Enclosure or fitted to combination unit) (10 kPa – 1000 kPa) Watermark & 4* WELS Certification.