Oval Security Basin



Scan QR code to view our installation notes



To order this item please advise:

- Fixing method: front or rear
- Waste type: standard or anti-ligature
- Tapware and tap hole details
- Tapware and tap hole details (if required)

- Product Info:
- Prison-grade vandal & ligature
 resistance

SPBO

- Radius safety fascia
 Concealed plumbing & wall fixings
- 1, 2 or 3 tap holes
- Front and rear fixed models
- 40mm waste supplied
- Suits P trap installation
- Optional tapware (see Tapware: Section 11)

Suggested Tapware:

(see Tapware Section: 11 for complete range of options)



TW-SEC-01 Security Tap Set (Cold Only)



TW-9201 Deluxe Timed Flow Pillar Tap



Security 3/4 Turn Basin Set (Hot & Cold)




Eco Timed Flow Pillar Tap

INSTALLATION NOTES

1) Fixture strength is ultimately determined by the load capacity of the supporting structure (noggins recommended for stud walls) and use of appropriate fixings. 2) Basin is secured to wall, mounted off the floor, via six integrated fixing holes (20mm dia.) Suggested additional fixings are six threaded rods with nuts and washers (not supplied). 3) An offset bracket is supplied to provide additional support to basin at rear. 4) Front fixed model is supplied with a side access panel. 5) Rear fixed model supplied without access panel.



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print

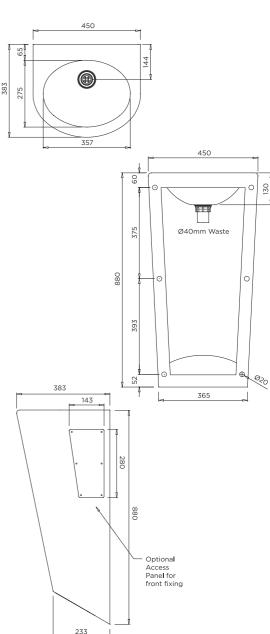

HAND BASINS

Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.