

Multi Knee Operated Trough



WELS REG #
Gooseneck Spout - T38022




TMKO

Product Info:

- Activated by user leaning against front panel
- Made to custom lengths
- Supplied pre-plumbed ready for mounting
- No electrical connections or power required
- Wall brackets and 50mm waste supplied
- One central water connection point with integral hot & cold mixing unit

To order this item please advise:

- Trough length
- Number of wash stations
- Spout type: goose neck
- Waste position - Left or Right

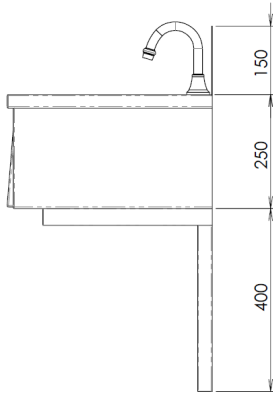

INSTALLATION NOTES

- 1) Fixture strength is ultimately determined by the load capacity of the supporting structure (noggins recommended) and use of appropriate fixings.
- 2) Trough supplied pre-plumbed with 1/2" BSP hot and cold connections on mixing unit at the centre/rear of the trough with integrated PLV.
- 3) Trough mounted to wall via two end brackets that support the underside of the fixture.
- 4) Water connections to mixing unit: Min = 250kPa, Max = 500kPa.
- 5) Front support legs supplied only by specific request.

