



Scan QR code
to view online



features and benefits

- Concealed tapware connections
- Standard and custom lengths
- Custom manufactured to any length between 600mm and 6000mm
- Range of tapware options (see reverse page)
- 50mm waste & wall brackets supplied
- Left or right hand waste position
- Radius internal corners - easy cleaning
- Radius external corners - added safety
- Ideal for schools, kindergartens, factories and public amenities

about

The *BRITEX Stainless Steel PWD Wall Mounted Trough* can be used as either a drinking or wash trough. Fully welded, rounded corners both internally and externally ensure easy cleaning and provide added safety in high traffic areas. A 50mm hob in the splashback eliminates the need for rear wall penetrations and conceals all tapware connections. The PWD trough is supplied with heavy duty wall brackets and/or legs and can be supplied with tapware if required (see reverse page for tapware options).

For 'Pre-Plumbed' PWD Troughs please refer to pg 4.01: Drinking and pg 4.02: Hand Washing.

sample spec. text

BRITEX S.S. PWD Wall Mounted Trough - XXXXmm Long. Complete with radius internal and external bowl corners, wall brackets, 50mm left/right hand waste outlet and XXXX tapware - Product Code TPWD-X-TW-XXXX-XXXX-XX-X

NB Please refer to reverse page for tapware and trough options

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

PWD WALL MOUNTED TROUGH

PRODUCT CODE

TPWD

HOW TO SPECIFY: PWD Wall Mounted Trough

Sample Specification Code

A B C D E F
TPWD - 3 - TW-9104 - 1500 - WB - R

= PWD Wall Mounted Trough with 3 Timed Flow Bib Tap, 1500mm long, Brackets only, Right Hand Waste

Specification Key

A = Product Code

B = Tap Quantity

C = Tap Code
 (see below for suggested tapware options)

D = Trough Length (mm)

E = Support Options

WB : Brackets only

BL : Brackets and Legs

F = Waste Outlet Position

L : Left Hand Waste

R : Right Hand Waste

Common Trough and Tap Combinations:

1200mm - 3 taps
 2400mm - 6 taps

1500mm - 3 taps

1800mm - 4 taps

Suggested Tapware Options:

(see Tapware Section: 11 for complete range of options)



TW-9104
Timed Flow Bib Tap



TW-9203
Deluxe Timed Flow Bib Tap



TW-0007
Top Activated Timed Flow Bib Tap



TW-SET-01
Wall Mounted Tap Set



TW-0048
Top Lever Timed Flow Bib Tap



TW-9106
Front Lever Timed Flow Bib Tap

When specifying this product please include:


- Product **Name** and **Code**
- Product **Dimensions**
- **Tapware** details (if required)
- Position of **Waste Outlet** (left/right)

specifying guide


options

Suggested Mounting Heights (mm)

	infant	primary	secondary
wash	550	650	700
drink	550	700	900

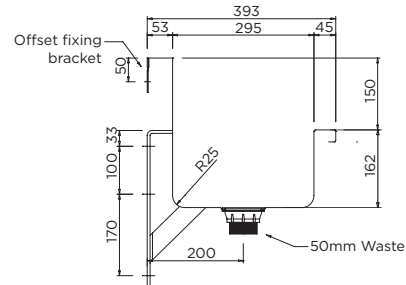


MODEL TPWD Section

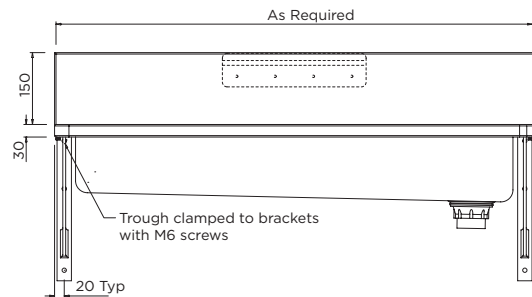

Troughs over 2000mm long are supplied with a centre support bracket

MODEL TPWD Front Elevation

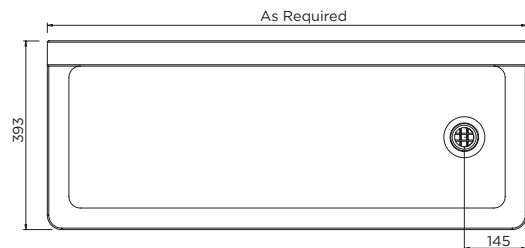

MODEL TPWD Plan