

# Screen Print Trough



TSP

Scan QR code  
to view our  
installation notes




**To order this item please advise:**

- Trough length
- Waste position - Left or Right
- Model: TSP (wall brackets only)  
TSPL (brackets and legs)

**Product Info:**

- Commercial grade 304 stainless
- Integrated tubular overhead drying rack
- Full height splashback
- Optional adjustable support legs
- Radius internal trough corners
- Wall brackets and 50mm waste supplied
- Available in standard and custom lengths

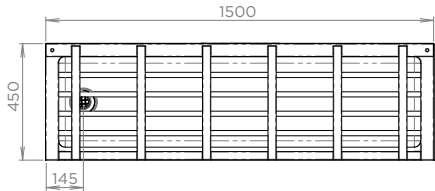

## INSTALLATION NOTES

- 1) Fixture strength is ultimately determined by the load capacity of the supporting structure (noggins recommended for stud wall construction) and use of appropriate fixings (i.e. sleeve anchors for masonry walls).
- 2) Trough is mounted to rear wall via an offset bracket positioned at the rear of the splashback and with brackets supporting either end of the wash trough. 3) Front support legs are supplied only by specific request.

