

VANDAL RESISTANT PUSH BUTTON PILLAR TAP - HOT



WELS REG # T09776



features and benefits

- Choice of auto shut-off or standard operation
- Clean hygienic design
- Water saving
- Vandal resistant
- Easy to operate
- Low maintenance
- Finished in bright chrome plate for easy cleaning and added durability
- Ideal for public areas and education projects

about

Hob mounted pillar taps offered by BRITEX have been selected to complement specific stainless steel basins, sinks and troughs within the Britex range. Hob mounted pillar taps are supplied with anti-vandal handles, a heavy duty CP finish with either cam activation (automatic shut-off) or as a standard 3/4 turn tap with vandal resistant aerator. These taps are particularly suited to public amenities and education projects. We are proud to offer these premium quality taps in conjunction with our own first class fixtures. A practical solution for minimising water and energy usage, we are proud to offer these premium quality taps in conjunction with our own first-class fixtures.

sample spec. text

Vandal Resistant Push Button Pillar Tap - Hot - Product Code: TW-0033

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE
Britex Place, Mirra Crt
Bundoora VIC 3083
t (03) 9466 9000
f (03) 9466 9044

SYDNEY
16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
f (02) 9531 2800

PERTH
Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
f (08) 9248 6893

BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400
f (07) 3363 2444

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

VANDAL RESISTANT PUSH BUTTON PILLAR TAP - HOT

PRODUCT CODE

TW-0033

technical
information

WELS: 6 Star Rating (5.5L/min)

Nominal Flow Rate (LPM): 5.4

WaterMark: AS/NZS 3718 Lic. WMKA0034

Inlet: 1/2" BSP - Male


Headwork: Push button

Working Pressure Range (kPa): 100 Min - 500 Max

Working Temperature Range (°C): 5 Min - 60 Max

Construction: DZR Brass

Finish: Chrome

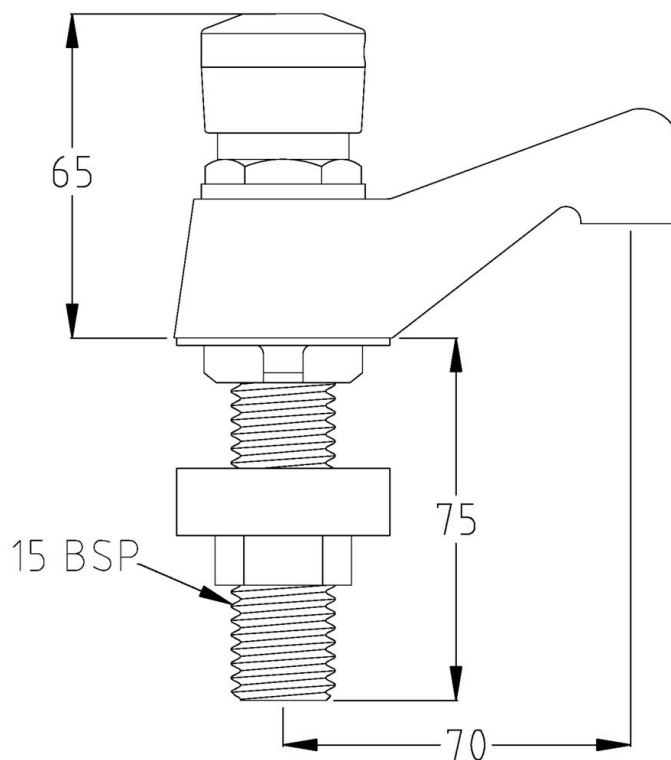

specifying
guide

*When specifying this
product please include:*

- Product Name and Code

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Nov 2023