

FRONT LEVER TIMED FLOW BIB TAP



WELS REG # T28488



features and benefits

- Push button and lever action models
- WaterMark certified
- Industry-leading water saving benefits
- Automatic shut-off after 7.5 3 2.5, timed flow operation
- Can't be left running after use
- Robust construction
- Choice of front or top activation models
- Premium, commercial quality tapware

about

BRITEX Front Lever Timed Flow Bib Tap Provides particularly easy tap activation on wall-mounted troughs in schools and child care facilities, where hygiene and reliable performance are a must. Featuring lever activation and water-saving benefits with automatic shut-off, perfectly paired with BRITEX troughs.

sample spec. text

Britex Front Lever Timed Flow Bib Tap - Product Code: TW-9106

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE
Britex Place, Mirra Crt
Bundoora VIC 3083
t (03) 9466 9000
f (03) 9466 9044

SYDNEY
16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
f (02) 9531 2800

PERTH
Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
f (08) 9248 6893

BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400
f (07) 3363 2444

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737


FRONT LEVER TIMED FLOW BIB TAP

PRODUCT CODE

TW-9106



WELS: 6 Star Rating (4.5L/pm)
Nominal Flow Rate: 4.5 L/min
WaterMark: AS/NZS 3718 Lic. WMKA20010
Construciton: Brass
Finish: Chrome

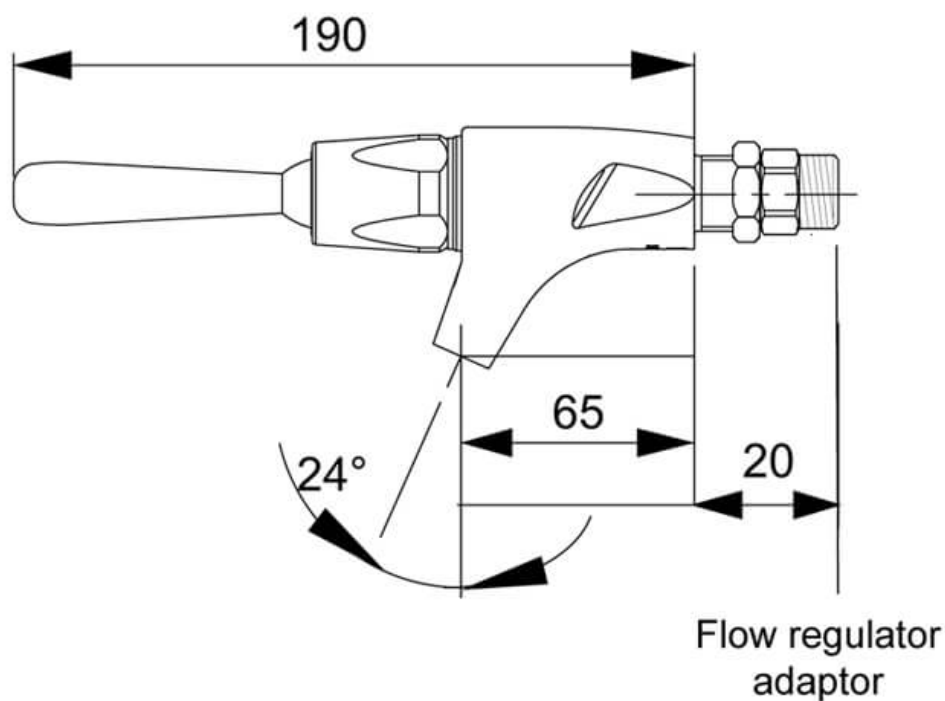

When specifying this product please include:

- Product Name and Code

VISIT [BRITEX.COM.AU](https://www.britex.com.au) TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Dec 2023



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to [britex.com.au](https://www.britex.com.au) for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

[britex.com.au](https://www.britex.com.au) | sales@britex.com.au | A.B.N 83 004 309 737

