

SS TIMED FLOW HOB MOUNTED PUSH BUTTON TAP



features and benefits

- 316 grade stainless steel
- Wash Safe™ lead free
- Self closing operation
- Vandal resistant design
- Low maintenance and easy to operate
- Water conserving
- Smooth design for easy clean and to help reduce dirt and bacteria growth

about

Designed to withstand the Australian environment with superior corrosion and rust resistance, the timed flow push button tap offered by BRITEX is made from marine grade 316 stainless steel. The self closing operation and vandal resistant design ensures longevity. Operating at full mains pressure the hob mounted tap is low maintenance, easy to operate and is both WELS and WaterMark certified. The smooth design makes it easy to clean and to help reduce dirt and bacteria growth. Timed flow taps are ideal for public amenities, education settings and other high traffic spaces.

sample spec. text

Britex SS Timed Flow Hob Mounted Push Button Tap - Product Code: TW-9111

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE
Britex Place, Mirra Crt
Bundoora VIC 3083
t (03) 9466 9000
f (03) 9466 9044

SYDNEY
16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
f (02) 9531 2800

PERTH
Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
f (08) 9248 6893

BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400
f (07) 3363 2444

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

SS TIMED FLOW HOB MOUNTED PUSH BUTTON TAP


PRODUCT CODE

TW-9111



technical
information

WELS: 6 Star Rating (4.0L/min)
Nominal Flow Rate (LPM): 3.93
WaterMark: AS/NZS 3718 Lic. WMKA0034
Inlet: 1/2" BSP - Male
Outlet: Aerator
Headwork: Timeflow Cartridge
Working Pressure Range (kPa): 200 Min - 400 Max
Working Temperature Range (°C): 5 Min - 65 Max
Construction: 316 Stainless Steel
Finish: Stainless Steel

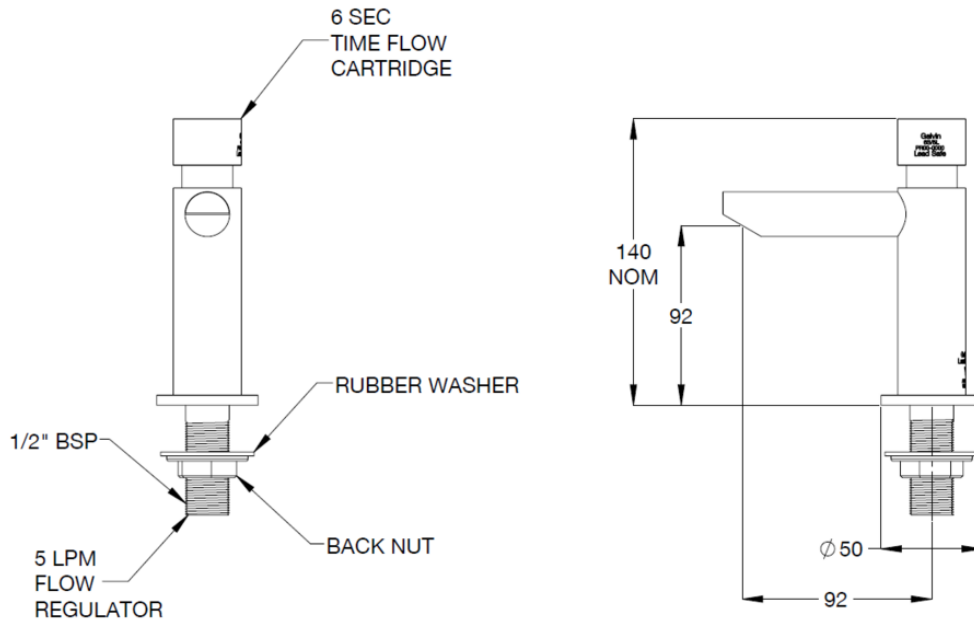

specifying
guide

When specifying this
product please include:

- Product Name and Code

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Jan 2024



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

