

316 SS DRINK SAFE™ GOOSENECK BOTTLE FILLER WITH ELECTRONIC PIEZO BUTTON



WELS #T32312



features and benefits

- 316 stainless steel construction
- Hygiene rinse is automatically set to remove any stagnant water. This will reduce the amount of metals that may leach into the water from the plumbing system, and assist in minimising the growth of bacteria such as Legionella
- Vandal resistant design
- Inbuilt adjustment for consistency of water flow
- Easy to use self-closing mechanism
- Easy to clean and maintain hygiene

about

BRITEX 316 SS Drink Safe™ Gooseneck Bottle Filler with Electronic Piezo Button includes water-conserving and cost-effective properties, the Drink Safe™ bottle filler is made from stainless steel material and is completely free of lead, aligning with Australian Building Codes Board advice. With easy self-closing mechanism and vandal design, the Drink Safe™ bottle filler is ideal for education applications and public areas.

sample spec. text

Britex 316 SS Drink Safe™ Gooseneck Bottle Filler with Electronic Piezo Button - Product Code: TW-BF-SS

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE
Britex Place, Mirra Crt
Bundoora VIC 3083
t (03) 9466 9000
f (03) 9466 9044

SYDNEY
16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
f (02) 9531 2800

PERTH
Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
f (08) 9248 6893

BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400
f (07) 3363 2444

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

316 SS DRINK SAFE™ BUBBLER WITH ELECTRONIC PIEZO BUTTON


PRODUCT CODE

TW-BF-SS



technical
information

WELS: 6 Star Rating (2.0L/min)
Nominal Flow Rate (LPM): 1.7
WaterMark: AS/NZS 3718 Lic. WMKA0034
Inlet: 1/2" BSP - Female
Outlet: Gooseneck
Headwork: Solenoid
Working Pressure Range (kPa): 50 Min - 500 Max
Working Temperature Range (°C): 5 Min - 60 Max
Construction: 316 Stainless Steel
Finish: Stainless Steel

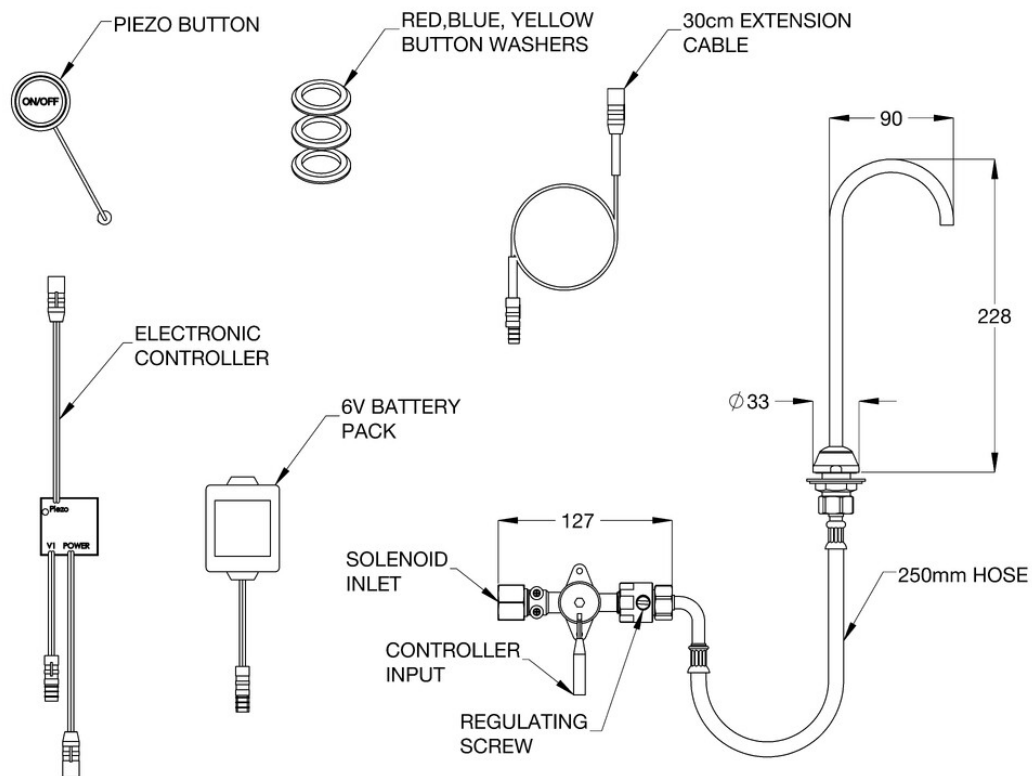

specifying
guide

When specifying this product please include:

- Product Name and Code

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Jan 2024



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

