

45° CHROME PLATED DRINKING BUBBLER LEVER ACTION



WELS REG # T08116



features and benefits

- Adjustable flow control valve allows water volume and height to be adjusted on site to ensure easy drinking
- Easy to use self-closing lever handle saving water and money
- High-quality chrome finish for easy cleaning and added durability
- Robust vandal-resistant handle increasing longevity of the product
- Vandal-resistant stainless steel grub screws
- Complies with NSW Education EFSG Guidelines

about

A wall mounted self closing fountain for dispensing drinking water generally used above a basin or in multiples in line above a drinking trough. The fixed metal mouth guard prevents unnecessary user contact with the water outlet. An adjustable flow control allows the height of the drinking water stream to be set according to the site conditions. The two fixing screw holes in the wall flange allows the fountain to be secured in place.

sample spec. text

45° Chrome Plated Drinking Bubbler Lever Action - Product Code: TW-DL45

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE
Britex Place, Mirra Crt
Bundoora VIC 3083
t (03) 9466 9000
f (03) 9466 9044

SYDNEY
16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
f (02) 9531 2800

PERTH
Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
f (08) 9248 6893

BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400
f (07) 3363 2444

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737


45° CHROME PLATED DRINKING BUBBLER LEVER ACTION

PRODUCT CODE

TW-DL45



WELS: 6 Star Rating (2L/min)
Nominal Flow Rate (LPM): 1.7
WaterMark: AS/NZS 3718 Lic. WMKA0034
Inlet: 1/2" BSP Female
Outlet: Metal Mouthguard
Headwork: Cam Action
Working Pressure Range (kPa): 50 - 500
Working Temperature Range (°C): 5 - 60 °C
Construction: Brass
Finish: Chrome

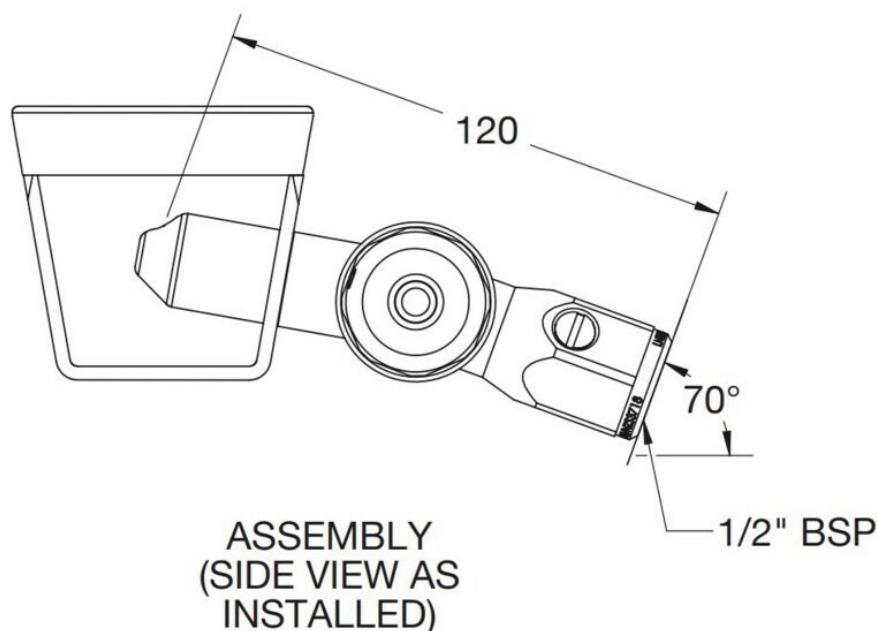

When specifying this product please include:

- Product Name and Code

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Oct 2023



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

