VERTICAL DRINK SAFE LEVER ACTION DRINK TAP - LH











- Manufactured using high quality DZR solid brass with less than 0.25% lead content*.
- Constructed from EPDM material the AS 4020 approved mouthguard is antibacterial, and UV stabilised against sun damage
- Vandal resistant design
- Inbuilt adjustment for consistency of water flow
- Easy to use self-closing mechanism
- High quality chrome finish for easy cleaning and hygiene maintenance



BRITEX Vertical Drink Safe Lever Action Drink Tap - LH includes water-conserving and cost-effective properties, the Drink Safe™ bubbler is made from stainless steel material and is completely free of lead, aligning with Australian Building Codes Board advice. With easy self-closing mechanism and vandal design, the Drink Safe™ bubbler is ideal for education applications and public areas.



Britex Vertical Drink Safe Lever Action Drink Tap - LH - Product Code: TW-DV-LL

*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE Britex Place, Mirra Crt Bundoora VIC 3083 t (03) 9466 9000 f (03) 9466 9044 **SYDNEY** 16 Northumberland Drv Taren Point NSW 2229 t (02) 9531 2100 f (02) 9531 2800

Y PERTH V Unit 1/8 Principal Link 9 Malaga WA 6090 0 t (08) 9249 5464 0 f (08) 9248 6893
 BRISBANE
 ADELAIDE

 19 Manilla St
 The Britex Group

 Brisbane QLD 4169
 SA State Office

 t (07) 3363 2440
 t 1300 764 744

 f (07) 3363 2444
 f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

#TW-DV-LL / VERTICAL DRINK SAFE LEVER ACTION DRINK TAP - LH


VERTICAL DRINK SAFE LEVER ACTION DRINK TAP - LH


PRODUCT CODE

TW-DV-LL



WELS: 6 Star Rating (2.0L/min) Nominal Flow Rate (LPM): 1.7 WaterMark: AS/NZS 3718 Lic. WMKA0034 Inlet: 1/2" BSP - Male Outlet: Rubber Mouthguard Headwork: Lever Action Working Pressure Range (kPa): 50 Min - 500 Max Working Temperature Range (°C): 5 Min - 60 Max Construction: 316 Stainless Steel Finish: Chrome

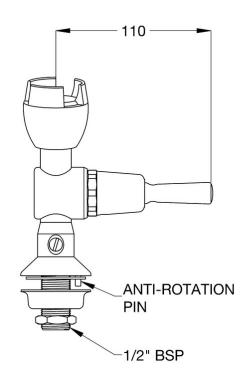

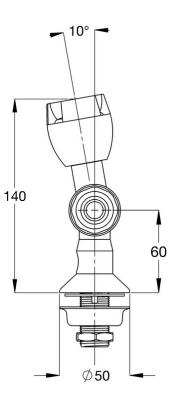



When specifying this product please include:Product Name and Code

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.





Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.