KITCHEN TAPWARE: PRE RINSE SPRAYS -HOB MOUNTED-NO POT FILLER









- · Commercial grade quality and fully backed by our industrial warranty
- Support spring in chrome-plated steel allows the trigger hose to be pulled into the spraying position and to return back from the washing area when released
- Separate contra-rotating heavy pattern lever handles with unique fast-action 1/4 turn brass spindles and jumper valves to provide either hot, cold water or mixed water
- · Easy to assemble and adjustable wall bracket
- Flexible hose TPU inner
- Twinner tap body is forged in brass and chrome-plated heavy-duty construction and it is resistant to temperature up to 90°C
- · Main riser pipe in stainless steel, and designed for quick and easy installation



Pre-rinse sprays offered by BRITEX have been selected to complement stainless steel sinks, benches, basins and troughs within the Britex range. The pre-rinse sprays we supply are sourced from Galvin Engineering, one of Australia's most respected manufacturers of commercial tapware. Pre-rinse sprays are robust in design and built to last, made from the highest quality materials. Pre-rinse sprays comply with all relevant standards including AS/ NZS 3718 and are tested for cleanability to ASTM F2324-03 at 21.46 seconds. The pot filler attachment on pre-rinse sprays is WELS 0* rated to allow for fast pot filling. We are proud to offer these premium quality taps in conjunction with our own first class fixtures.



Britex Kitchen Tapware: Pre Rinse Sprays-Hob Mounted-No Pot Filler - Product Code: TW-PR-HM

*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

SYDNEY

VISIT **BRITEX.COM.AU** TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATUR



KITCHEN TAPWARE: PRE RINSE SPRAYS -HOB MOUNTED-NO POT FILLER

PRODUCT CODE

TW-PR-HM




WELS: 6 Star Rating (4.5L/min) Nominal Flow Rate (LPM): 3.4 Inlet: 1/2" BSP - Female Flexi Tail

Outlet: Trigger Spray Headworks: Jumper Valve

Working Pressure Range (kPa): 100 Min - 500 Max Maximum Working Temperature (°C): 5 Min - 65 Max

Construction: Brass Finish: Chrome

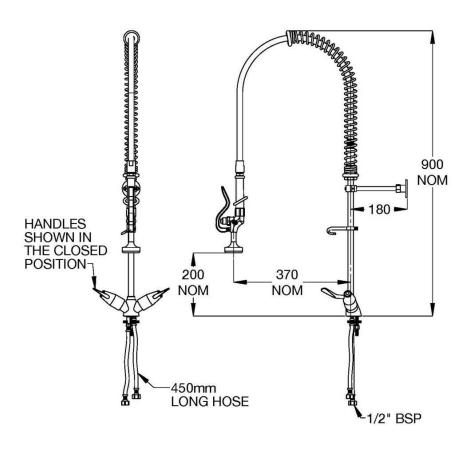



When specifying this product please include:

• Product Name and Code

VISIT **BRITEX.COM.AU** TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE

Last Revised Apr 2024



