

HOB MOUNTED SINK SET WITH SWIVEL SPOUT



WELS REG # T09991



features and benefits

- Vandal resistant
- Optional fixed or swivel spout
- Heavy duty bright CP finish
- WaterMark and WELS certified
- Locking ring on handle
- Ideal for education projects

about

Vandal resistant hob mounted tapware. Handles feature locking ring to secure handle to spindle, removable only with a key provided. Heavy duty bright CP finish. Perfect for education facilities and busy public amenities.

sample spec. text

Hob Mounted Sink Set with Swivel Spout- Product Code: TW-SET-03

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE
Britex Place, Mirra Crt
Bundoora VIC 3083
t (03) 9466 9000
f (03) 9466 9044

SYDNEY
16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
f (02) 9531 2800

PERTH
Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
f (08) 9248 6893

BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400
f (07) 3363 2444

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737


HOB MOUNTED SINK SET WITH SWIVEL SPOUT

PRODUCT CODE

TW-SET-03

technical
information

WELS: 5 Star Rating (6L/min)
Nominal Flow Rate (LPM): 5.8
WaterMark: AS/NZS 3718 Lic. WMKA0034
Inlet: 1/2" CU / BSP
Outlet: Aerator
Headwork: Jumper Valve
Working Pressure Range (kPa): 100 Min - 500 Max
Working Temperature Range (°C): 5 Min - 80 Max
Finish: Chrome

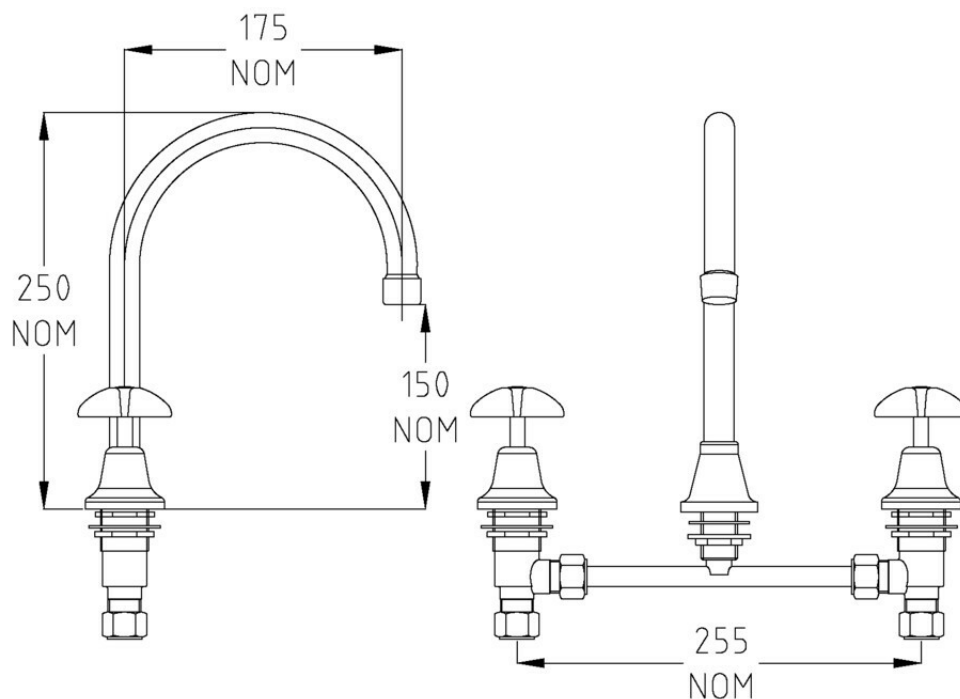

specifying
guide

*When specifying this
product please include:*

- Product Name and Code

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Dec 2023