

# VANDAL RESISTANT SHOWER SET



## features and benefits

- Vandal resistant handle featuring a locking ring to secure the handle to the spindle
- Standard with jumper valve
- Half turn ceramic disc available on request
- Chrome plate finish for easy cleaning and added durability
- Vandal resistant shower rose
- Complies with NSW Education EFSG Guidelines

## about

DPW (NSW) Shower Set with low profile, ligature-resistant shower head, loose jumper valves and vandal resistant handles. Heavy duty bright CP finish and 5L.min flow regulator. Ideally suited to public amenities, sporting grounds and education facilities.

## sample spec. text

*Britex Vandal Resistant Shower Set - Product Code: TW-SET-06*

\*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT [BRITEX.COM.AU](http://BRITEX.COM.AU) TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



**MELBOURNE**  
Britex Place, Mirra Crt  
Bundoora VIC 3083  
t (03) 9466 9000  
f (03) 9466 9044

**SYDNEY**  
16 Northumberland Drv  
Taren Point NSW 2229  
t (02) 9531 2100  
f (02) 9531 2800

**PERTH**  
Unit 1/8 Principal Link  
Malaga WA 6090  
t (08) 9249 5464  
f (08) 9248 6893

**BRISBANE**  
19 Manilla St  
East Brisbane QLD 4169  
t (07) 3363 2400  
f (07) 3363 2444

**ADELAIDE**  
The Britex Group  
SA State Office  
t 1300 764 744  
f 1300 784 306

[britex.com.au](http://britex.com.au) | [sales@britex.com.au](mailto:sales@britex.com.au) | A.B.N 83 004 309 737


# VANDAL RESISTANT SHOWER SET

PRODUCT CODE

## TW-SET-06

technical  
information

**WELS:** 3 Star Rating (9L/min)  
**Nominal Flow Rate (LPM):** 8.4  
**WaterMark:** AS/NZS 3718 Lic. WMKA0034  
**Inlet:** 1/2" BSP - Female  
**Outlet:** Shower Rose  
**Headwork:** N/A  
**Working Pressure Range (kPa):** 150 Min - 500 Max  
**Working Temperature Range (°C):** 5 Min - 70 Max  
**Construction:** Brass  
**Finish:** Chrome

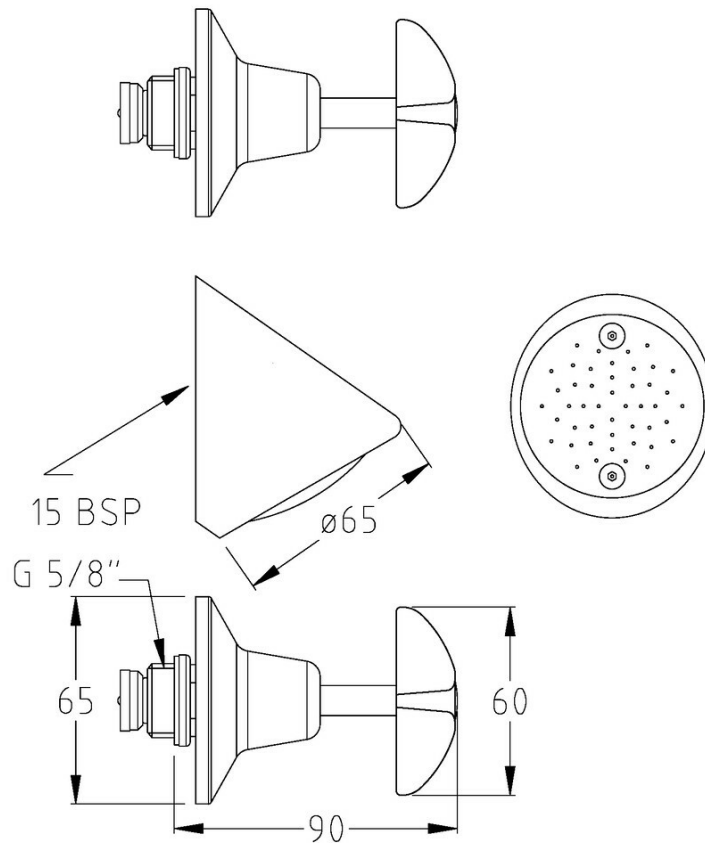

specifying  
guide

*When specifying this  
product please include:*

- Product Name and Code

VISIT [BRITEX.COM.AU](http://BRITEX.COM.AU) TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

*Last Revised Dec 2023*

**BRITEX**  
innovating since 1938

Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to [britex.com.au](http://britex.com.au) for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

[britex.com.au](http://britex.com.au) | [sales@britex.com.au](mailto:sales@britex.com.au) | A.B.N 83 004 309 737

