
## WALL MOUNTED SENSOR TAP WITH 165MM SPOUT

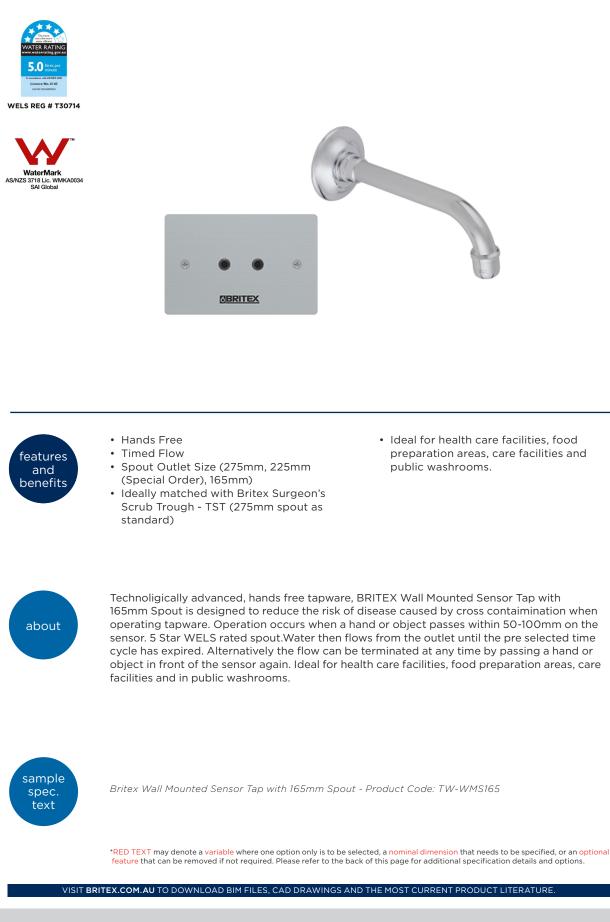

MELBOURNE Britex Place, Mirra Crt Bundoora VIC 3083 t (03) 9466 9000 f (03) 9466 9044 **SYDNEY** 16 Northumberland Drv Taren Point NSW 2229 t (02) 9531 2100 f (02) 9531 2800

Y PERTH Unit 1/8 Principal Link Malaga WA 6090 t (08) 9249 5464 f (08) 9248 6893 BRISBANE 19 Manilla St T East Brisbane QLD 4169 t (07) 3363 2400 f (07) 3363 2444

 BANE
 ADELAIDE

 anilla St
 The Britex Group

 LD 4169
 SA State Office

 53 2400
 t 1300 764 744

 63 2444
 f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737


## WALL MOUNTED SENSOR TAP WITH 165MM SPOUT

PRODUCT CODE

## **TW-WMS165**



WELS: 5 Star Rating (5.5L/min) Nominal Flow Rate (LPM): 5.5 WaterMark: AS/NZS 3718 Lic. WMKA0034 Inlet: 1/2" BSP - Female Outlet: Laminar Flow Aerator Head of work: Solenoid Working Pressure Range (kPa): 50 Min to 500 Max Working Temperature Range (°C): 5 Min - 90 Max Finish: Brush Stainless Steel Sensor Plate and Chrome Outlet

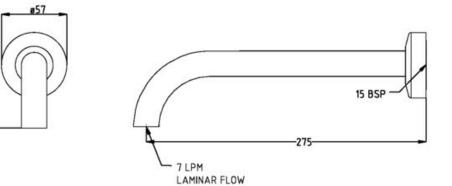



When specifying this product please include:

• Product Name and Code

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Dec 2023



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.