

Dado Double Square

DDS2



Scan QR code to view our installation notes




Product Info:

- Incorporates both disabled and compact fountains
- Disabled fountain = AS1428 compliant
- Front push, timed flow bubblers
- 40mm wastes and stainless wall bracket
- Optional bottle filler taps
- Optional remote refrigeration unit
- Commercial grade 304 S.S.

To order this item please advise:

- Ambient or refrigerated water
- If bottle filler taps are required (TW-BF-HF)
- Replacement Battery Pack for Activation Button (74-08-0106)

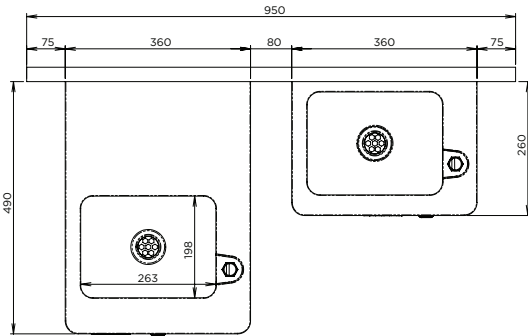

Disabled

Compact

INSTALLATION NOTES

1) Fixture strength is ultimately determined by the load capacity of the supporting structure (noggin recommended for stud walls) and use of appropriate fixings (i.e. sleeve anchors for masonry walls). 2) Fountain is secured to wall at the top of the splashback with an offset bracket (supplied) and with an L-shaped, angle bracket (supplied) concealed behind the bottom of the splashback. 3) Traps and fixings (other than wall bracket) not supplied. 4) Water connections to 1/2" solenoids: min = 150kPa, max = 500kPa. 5) An in-line filter to prevent debris fouling solenoids is recommended.

Refrigerated model: supplied with remote chiller (360L x 170W x 340H) to be installed in wall cavity behind fountain. 7) 10 amp standard power outlet required. 8) Single water connection to chiller is 1/2" female BSP, min = 250kPa, max = 500kPa.

